

# ASSESSING THE VISIBILITY OF RAISED PAVEMENT MARKERS AND ALTERNATIVE FORMS OF DELINEATION

**Abstract.** Raised pavement markers (RPMs) are used by a number of transportation agencies with the objective of improving roadway safety, especially in complex roadway geometries and along wet roads. Because of maintenance and cost issues, many transportation agencies are exploring alternatives to RPMs such as wet reflective pavement tape and barrier-mounted reflective delineators. In order to assess the relative potential of these devices to contribute to nighttime driving safety, the luminances of new and used RPM samples from different manufacturers and having different colors and of several alternative delineation devices were measured in the laboratory using a range of geometric conditions relevant to the driving task. From these data, Luminances under representative low-beam headlight illumination were determined and these quantities were used to estimate driver visual performance. Large variations in luminance yielded relatively small differences in visual performance for a viewing distance of 100 m, primarily because of the plateau characteristic of visual performance. Differences in threshold visibility distances were greater, with distances at identification threshold for the devices measured ranging from approximately 150 to 400 m. Used RPMs had luminances 20% to 30% lower than new RPMs but similar visibility characteristics as new devices. The analysis method in this study may be useful for practitioners seeking to characterize the visual effectiveness of RPMs and other roadway delineation devices and systems.

**Keywords:** visual performance, pavement markings, roadway delineators, visibility distance, retroreflectivity.

## Introduction

Raised pavement markers (RPMs) are used by a number of transportation agencies with the objective of improving roadway safety. When roadway curvature impairs the visibility of conventional pavement markings, RPMs are thought to provide additional visual guidance that can provide drivers with extended preview time about the roadway geometry, lane width and other visual cues. RPMs also provide improved visibility in wet weather because with these devices, the visible or reflective element is raised above the level of water on the pavement surface (Lay, 2009). Because of maintenance issues and costs associated with RPMs (Bahar et al., 2004), transportation agencies have also investigated alternative delineation devices and systems, including wet reflective pavement marking tape and barrier-mounted reflective delineators.

## 1. Literature review

Several studies of the impacts of RPMs on driving behavior and on traffic safety have been performed. For example, Niessner (1984), Krammes and Tyler (1991) and Hammond and Wegmann (2001) found a reduction in encroachments into opposing lanes was associated with the installation of RPMs. Effects on vehicle speed, in comparison, have been mixed (Niessner, 1984; Zador et al., 1987) and likely interact with roadway geometry. With respect to traffic safety, results also appear to be mixed (Wright et al., 1982; Griffin, 1989; NYSDOT, 1997; Bahar et al., 2004). Bahar et al. (2004) reported that crashes in locations with higher traffic volumes and occurring at night during wet weather conditions were more likely to be reduced than other situations. Lyon et al. (2015) evaluated safety impacts of wet reflective pavement markings, and found they were associated with fewer crashes. Haas (2004) reported that vehicle speeds tended to be reduced in work zones following the installation of barrier-mounted reflective delineators; reduced speeds were thought to contribute to increased safety.

Relatively few safety evaluations of RPMs have been conducted within the past five years. More recently, Liang et al. (2018) investigated the potential effect of angling RPMs toward oncoming drivers on visibility, but found this would make little difference. Lu et al. (2016) suggested several geometric modifications to the shape of RPMs to increase their durability when vehicles drive over them, but this study did not assess visibility.

Cautiously accepting the tentative conclusions of Bahar et al. (2004), Lyon et al. (2015) and Haas (2004) that RPMs can benefit safety, the present paper describes efforts to characterize RPMs and alternatives to RPMs in terms of their luminances when exposed to headlight illumination and subsequently in terms of their visibility using the relative visual performance (RVP) model (Rea and Ouellette, 1991). Visual performance analyses are used in this study because unlike some road safety systems such as rumble strips using tactile information, the benefit of RPMs is through their visual information. The RVP model characterizes the speed and accuracy of visual processing as a function of luminance, contrast, and size of a visual target for an observer of a particular age.

RVP quantities range from zero at the threshold of visual identification to values greater than one; a value of one corresponds to a reference visibility condition similar to reading large, high-contrast printed text under office

lighting levels. Values higher than one are possible, but once an RVP value of 0.8 to 0.9 is reached, further increases in light level, contrast or size are unlikely to have substantial impacts on visual speed and accuracy, because visual performance exhibits a “plateau” response, with diminishing returns once a visual target is on the plateau (e.g., doubling the luminance of an object will not double its visibility; it may even have a negligible impact on visibility, if visibility is already high). Equations for calculating RVP have been published by Rea and Ouellette (1991) and by Bullough et al. (2008).

The plateau characteristic of visual performance is an important impetus for determining not only the photometric and retroreflective performance of RPMs and other devices, such as measurements recently reported by Pike (2017), but also to identify how light level, viewing distance and device performance interact to provide a useful visual stimulus to drivers approaching them.

The RVP model has been shown to be strongly correlated to psychophysical measures such as response times, detection distances and legibility of signs and symbols in the roadway driving context (Bullough and Radetsky, 2014). Further, Bullough et al. (2013) have shown strong correlations between RVP improvements associated with roadway intersection lighting and nighttime crash reductions at intersections outfitted with lighting. These findings suggest the RVP model could have utility in assessing the visual effectiveness of RPMs and of alternatives to RPMs.

## 1.1. Study Objective

A gap in the literature regarding the benefits of RPMs is how they compare to alternatives such as those described above. In order to address this knowledge gap about the visual effectiveness of RPMs and other devices as experienced by drivers under nighttime conditions, the objective of the present study was to use laboratory measurements and subsequent photometric and visibility analyses to evaluate not only the luminance but also the visual performance expected of specific RPMs and alternative devices under a representative range of geometric conditions under real-world situations. Doing so would help transportation agencies identify when and where RPMs and their alternatives may be most beneficial to driving safety, since their benefit is primarily visual.

## 2. Methods

The procedure used to measure the luminances of RPMs and their alternatives in the laboratory was not a formally standardized procedure such as that developed by ASTM (2012) for RPMs, using specialized instrumentation or specific viewing geometries; rather it was developed to assess luminance, retroreflectivity, and ultimately, visual performance for a range of geometric conditions that might be relevant to nighttime driving (i.e., vertical angles from straight ahead to 1° down, and horizontal angles from 10° left to 10° right, to capture a range of roadway curvatures), and which could be used not only for RPMs but also with other types of delineation systems as well. New RPMs from three manufacturers (denoted A, B and C) were obtained including white, yellow, red and blue markers (not all colors were available from each manufacturer). Wet pavement reflective tape samples (10 cm wide × 10 cm long) from one manufacturer were obtained in white and yellow colors. Barrier-mounted reflective delineators (10-cm wide white, 6-cm wide yellow, 15-cm wide orange and 10-cm wide red) were also tested; each was 0.9 m in length. All of these devices were tested in good, new condition.

Two used yellow RPMs from one of the three manufacturers (B) that had been in service on highways in New Jersey were provided by the New Jersey Department of Transportation (NJDOT) in order to check the magnitude of any degradation in performance after use, compared to new RPMs of the same type and from the same manufacturer. The ages of the used RPMs were not known; they were scratched, dirty and had small portions of the retroreflective elements missing, but were not severely damaged.

RPMs (Figure 1) and wet reflective tape samples affixed to black painted plywood (Figure 2) were mounted onto a platform fastened to a tripod (see Figure 3), and adjusted for height and orientation to be either 0° or 1° below the entrance optics of a handheld luminance meter (Minolta, LS-100), which was mounted onto another tripod 6 m away (Figure 4). The barrier-mounted reflective delineator samples (Figure 5) were attached to a 0.9-m long piece of plywood, which was mounted onto the tripod in a vertical orientation as these devices would be in practice. Because the barrier-mounted reflective delineator is intended to be mounted above ground level, only the 0° vertical angles were used for these devices.



Fig. 1. Examples of RPM samples.

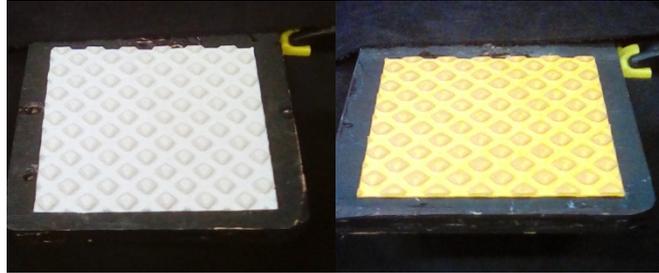


Fig. 2. Examples of wet reflective pavement marking tape samples.



Fig. 3. RPM measurement sample mounted on tripod platform.



Fig. 4. Luminance meter and light source (left: front view; right: side view).

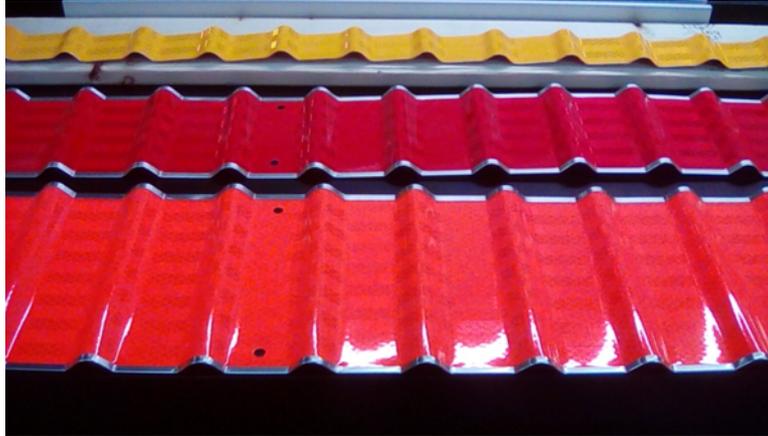


Fig. 5. Examples of barrier-mounted reflective delineator samples.

Also attached to the luminance meter (and shown in Figure 4) was a 40-W incandescent appliance lamp bulb, producing a spectral distribution very similar to Illuminant A specified by ASTM (2012), positioned 10 cm below the luminance meter's entrance optics (and located  $1^\circ$  below from a distance of 6 m, corresponding to an entrance angle of  $1^\circ$ ). All laboratory measurements were made under dry conditions.

The measurement sample tripod could be moved to different lateral positions to be located directly ahead of the luminance meter ( $0^\circ$  horizontal angle), or  $5^\circ$  or  $10^\circ$  to either side (left or right) of the luminance meter (these angles approximated the observation angle for each condition). The height of the tripod could be set to match the height of the luminance meter entrance optics or 10 cm below ( $1^\circ$  below the luminance meter entrance optics for the measurement distance of 6 m, as illustrated in Figure 3). An angle of  $1^\circ$  below the meter's entrance optics corresponds to a viewing distance of 83 m ahead of a vehicle (IES, 2014), for a perfectly flat road. Some of the RPMs were mounted in steel casters, and portions of RPM housings that were constructed of light-colored material were colored with a black permanent magic marker to reduce measurement noise.

All measurements took place in a black-painted laboratory to minimize reflections from stray light. The calibrated luminance meter was used with a spot size large enough (i.e.,  $1^\circ$ ) to completely encompass the device from 6 m away. The device locations used are described graphically in Figure 6.

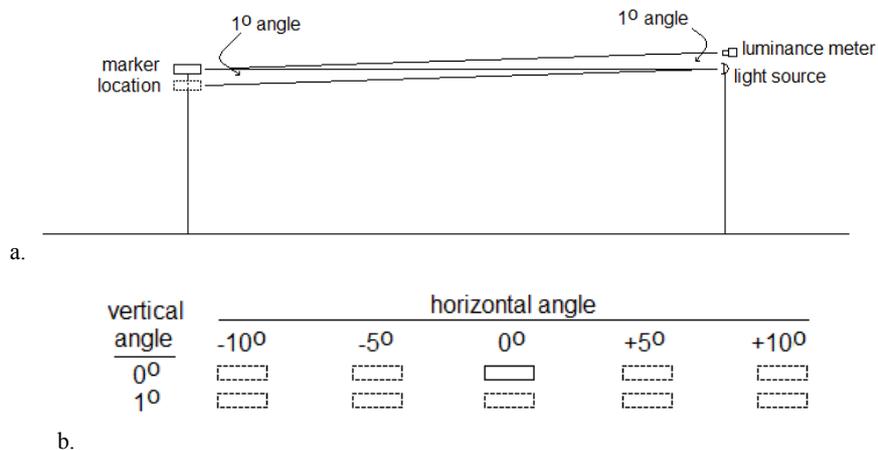


Fig. 6. a. Plan view of measurement geometry showing the vertical measurement angles. b. Horizontal and vertical locations of the device being measured, viewed from the location of the light source. Negative horizontal angles correspond to those to the left of center (toward the driver side); positive horizontal angles correspond to those to the right of center (toward the passenger side).

The  $1^\circ$  range of vertical angles and  $20^\circ$  range of horizontal angles corresponds to the representative ranges for pavement-mounted reflectors that could be encountered on roadway curves, and to the approximate angular region within which headlight intensity is highest (Bhise et al., 1977). With the light source energized, the luminance meter was used to capture the luminance of the  $1^\circ$  viewing aperture centered around the marker or device ( $L_a$ , in  $\text{cd}/\text{m}^2$ ). The projected angular area of a  $1^\circ$  luminance spot is  $0.785$  degrees<sup>2</sup>. The projected angular area ( $A_p$ , in degrees<sup>2</sup>) was calculated for the marker or device being measured. Its luminance ( $L_m$ , in  $\text{cd}/\text{m}^2$ ) could be calculated from the luminance spot measurement value using the following equation:

$$L_m = L_a \left( \frac{0.785}{A_p} \right) \quad (1)$$

The vertical illuminance ( $E$ , in lx) from the light source at each location in Figure 6 was also measured. From these data, it was possible to calculate the coefficient of retroreflectivity ( $R_c$ , in cd/lx/m<sup>2</sup>) for each angle (as a function of the vertical illuminance), using the following equation:

$$R_c = L_m/E \quad (2)$$

This quantity is independent of the amount of illumination falling on the device at any particular location, because the coefficient of retroreflectivity is defined as the ratio of its luminance for a given vertical illuminance. If the vertical illuminance were doubled, the device luminance would also be doubled, but the ratio between these quantities would remain the same.

Finally, to estimate what the luminance of the device would be in a representative roadway scenario ( $L_{rs}$ , in cd/m<sup>2</sup>) under low beam headlamps at a given distance  $d$  (in m), market-weighted headlamp intensity values ( $I$ , in cd; see Table 1) from Schoettle et al. (2004) were applied to the corresponding angular location's coefficient of retroreflectivity using the following equation:

$$L_{rs} = R_c I/d^2 \quad (3)$$

Table 1. Luminous intensities from a representative pair of low beam headlamps toward several angular locations.

Vertical Angle	Horizontal Angle				
	-10°	-5°	0°	+5°	+10°
0°	1346 cd	2186 cd	17,660 cd	9434 cd	2240 cd
1° down	6124 cd	10,612 cd	37,804 cd	19,796 cd	5602 cd

The data in Table 1 correspond to a pair of low beam headlights, assumed for this purpose to be co-located in the center front of an approaching vehicle. It can be seen in Table 1 that low beam headlights tend to produce more light at a vertical angle of 1° down than they do at 0°. The amount of light at the horizontal angle of +5°, which corresponds to one lane toward the passenger side of the vehicle 50 m ahead, is also larger than the amount of light at the horizontal angle of -5°, one lane toward the driver side.

The roadway scenario luminances were used, along with the physical dimensions of the projected retroreflective portions of each device, and an estimated roadway background luminance of 0.1 cd/m<sup>2</sup> (He et al., 1997), in order to calculate RVP (Rea and Ouellette, 1991) values for these situations under headlight illumination, from a distance of 100 m from the marker or device. A driver age of 60 years was assumed for all of the visual performance calculations; this age was used as a representative, older driver age. Drivers aged 60 years or younger include approximately three-quarters of the U.S. driving population (FHWA, 2011).

## 2.1. Relative visual performance calculation

This section of the paper describes the RVP calculation procedure (Rea and Ouellette, 1991; Bullough et al., 2008) used to estimate the visibility of each of the samples in the present study. Let  $A$  be the observer's age in years. Let  $L_b$  be the background luminance in cd/m<sup>2</sup> (assumed to be 0.1 cd/m<sup>2</sup> as described above). Let  $C$  be the luminance contrast, defined by  $C = |L_{rs} - L_b|/L_{rs}$ . Let  $S$  be the solid angular size of the target in microsteradians ( $\mu\text{sr}$ ), calculated by:

$$S = 1,000,000T/d^2 \quad (4)$$

where  $T$  is the projected area of the target (in m<sup>2</sup>) and  $d$  is the viewing distance (in m). Then, the pupil radius  $P$  is calculated, in mm:

$$P = 2.39 - 1.22 \tanh(0.3 \log L_b) \quad (5)$$

The pupil size is calculated because it impacts the amount of light reaching the retina of the eye. Following this, the age-corrected retinal illuminance  $E_r$ , in trolands (Td), is calculated:

$$E_r = \pi P^2 L_b \{1 - 0.017(A - 20)\} \quad (6)$$

Equation 6 adjusts the retinal illuminance due to the fact that the lens in the eye grows in thickness and reduces in transmittance as individuals age. Next, five intermediate values ( $x_1$ ,  $x_2$ ,  $x_3$ ,  $x_4$  and  $x_5$ ) are calculated:

$$x_1 = \log \{ \tanh(20,000S) \} \quad (7a)$$

$$x_2 = \log \left\{ \log \left( \frac{10E_r}{\pi} \right) \right\} \quad (7b)$$

$$x_3 = 1 + \{0.0025(A - 20)\} \quad (7c)$$

$$x_4 = \log \{ \tanh(5000S) \} \quad (7d)$$

$$x_5 = \log \left\{ \tanh \left( \frac{0.04E_r}{\pi} \right) \right\} \quad (7e)$$

The terms in Equations 7a through 7e represent curve-fitting parameters in the subsequent calculation of threshold contrast and visual response times. The threshold luminance contrast  $C_t$  is calculated as follows:

$$C_t = x_3 10^{-1.36-0.18x_1-0.81x_2+0.23x_1^2-0.077x_2^2+0.17x_1x_2} \quad (8)$$

The term  $C_t$  represents the minimum contrast that can be detected. The half-saturation constant  $K$  is calculated by:

$$K = 10^{-1.76-0.18x_4-0.031x_5+0.11x_4^2+0.17x_5^2+0.062x_4x_5} \quad (9)$$

The half-saturation constant is used to determine how far above threshold a particular target is. Once a target elicits a strong response (e.g., a short response time), further increases in luminance, contrast or size will not result in stronger responses. Next, the maximum response  $R_{\max}$  is calculated as follows:

$$R_{\max} = 0.0002 \log(E_r) + 0.0027 \quad (10)$$

The  $R_{\max}$  term is used to estimate the minimum response time that can be achieved for a particular retinal illuminance. The visual response time  $V$ , in ms, is calculated as:

$$V = \{(C - C_t)^{0.97} + K^{0.97}\} / \{(C - C_t)^{0.97} R_{\max}\} \quad (11)$$

The visual response time is an estimate of the average time needed to detect and signal a response to a visual target. Finally the relative visual performance ( $RVP$ ) value is calculated:

$$RVP = 1.42 - \frac{V}{778.56} \quad (12)$$

As mentioned previously,  $RVP$  is a unitless quantity ranging from zero at the threshold of visual identification to values of one or greater; a value of one corresponds to a large, high-contrast target viewed under high light levels.




### 3. Results

Table 2 illustrates, for a white RPM sample from Manufacturer A, the calculations made to identify its luminance under the laboratory test conditions based on the sample's size and measured luminance aperture value (Equation 1). Subsequent calculations in Table 2 estimate the coefficient of retroreflectivity for each of the geometric conditions that were measured (Equation 2), and calculations of the luminance that it would be expected to have under low-beam headlamp illumination at night from 100 m away (Equation 3). From these latter luminance values, visual performance analyses were performed (using Equations 4 through 12) to estimate an  $RVP$  value for each device, in each geometric location. It can be seen in Table 2 that the resulting  $RVP$  values (ranging from 0.995 to 1.029) were relatively insensitive to large variations in the luminance of the device (ranging from 16.42 cd/m<sup>2</sup> to 389.35 cd/m<sup>2</sup>). This insensitivity is related to the plateau characteristic of visual performance (Rea and Ouellette, 1991); large differences in luminance, provided the luminances contribute to visual performance at or near the plateau, elicit only small changes in  $RVP$ .

Table 2. Photometric/visual performance summary: White RPM sample (Manufacturer A).


<b>RPM A (white)</b>	<i>Proj. Area (deg<sup>2</sup>):</i> 0.068567				
<i>Measured Illuminance (lx)</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	0.6	0.7	0.8	0.7	0.6
-1 V	0.6	0.7	0.8	0.7	0.6
<i>Measured Luminance (cd/m<sup>2</sup>)</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	6.389	6.525	7.215	6.680	6.497
-1 V	6.477	6.212	7.193	6.284	6.729
<i>Actual Luminance (cd/m<sup>2</sup>)</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	73.18292	74.74074	82.64435	76.51619	74.42001
-1 V	74.19092	71.15547	82.39235	71.9802	77.07746
<i>Coefficient of Retro. (cd/lx/m<sup>2</sup>)</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	121.9715	106.7725	103.3054	109.3088	124.0333
-1 V	123.6515	101.6507	102.9904	102.8289	128.4624
<i>Headlight Intensity (cd)</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	1346	2186	17660	9434	2240
-1 V	6124	10612	37804	19796	5602
<i>Headlight Illuminance (lx)</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	0.1346	0.2186	1.766	0.9434	0.224
-1 V	0.6124	1.0612	3.7804	1.9796	0.5602
<i>RPM Luminance (cd/m<sup>2</sup>)</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	<b>16.42</b>	<b>23.34</b>	<b>182.44</b>	<b>103.12</b>	<b>27.78</b>
-1 V	<b>75.72</b>	<b>107.87</b>	<b>389.35</b>	<b>203.56</b>	<b>71.96</b>
<i>RVP Value</i>	Horizontal Angle (degrees)				
Vertical Angle (degrees) ↓	-10 H	-5 H	0 H	5 H	10 H
0 V	<b>0.995</b>	<b>1.000</b>	<b>1.022</b>	<b>1.016</b>	<b>1.002</b>
-1 V	<b>1.013</b>	<b>1.017</b>	<b>1.029</b>	<b>1.023</b>	<b>1.013</b>

Because of this insensitivity, only data for the horizontal angle of 0°, and for the vertical angle of 1° down (for RPMs and wet reflective pavement marking tape), or for the vertical angle of 0° (for the barrier-mounted reflective delineators) are shown in Figures 7 through 9 for each device. Figure 7 shows coefficients of retroreflectivity (cd/lx/m<sup>2</sup>), Figure 8 shows the device luminances (cd/m<sup>2</sup>) 100 m ahead of low beam headlight illumination, and Figure 9 shows the corresponding RVP values for each device under these conditions.

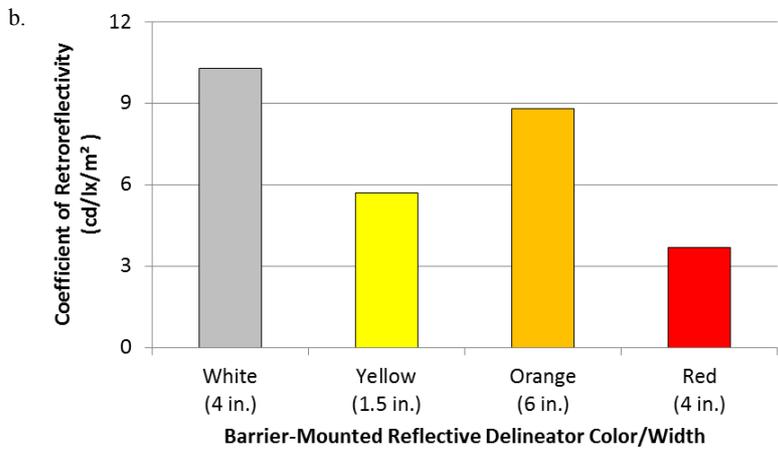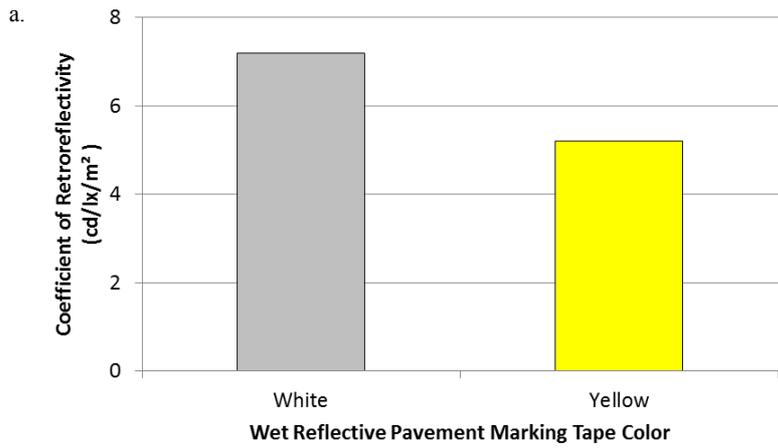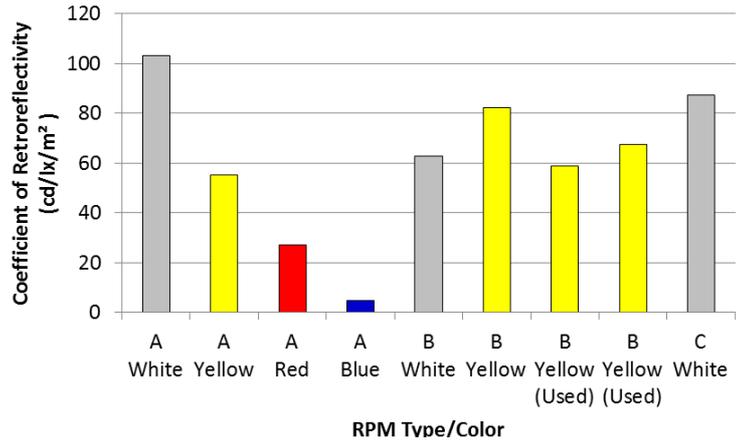


c.


Fig. 7. Coefficients of retroreflectivity (cd/lx/m<sup>2</sup>) for a. RPMs, b. wet reflective pavement marking tape, and c. barrier-mounted reflective delineators.

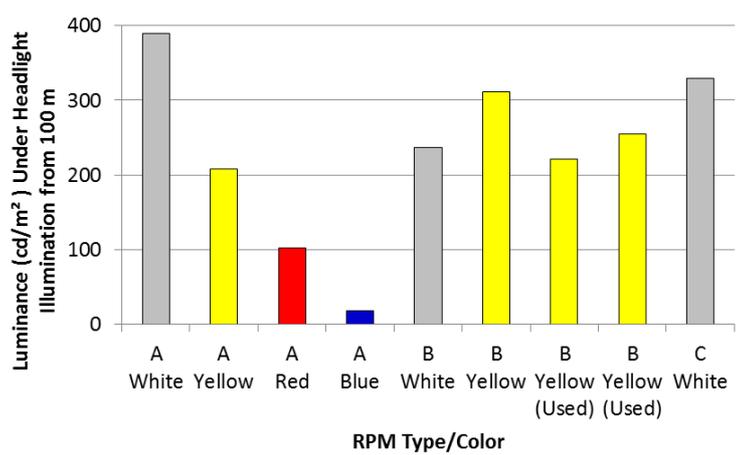

a.

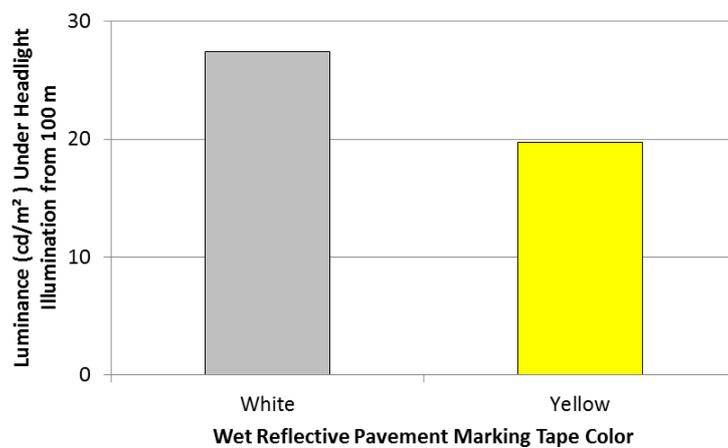


b.

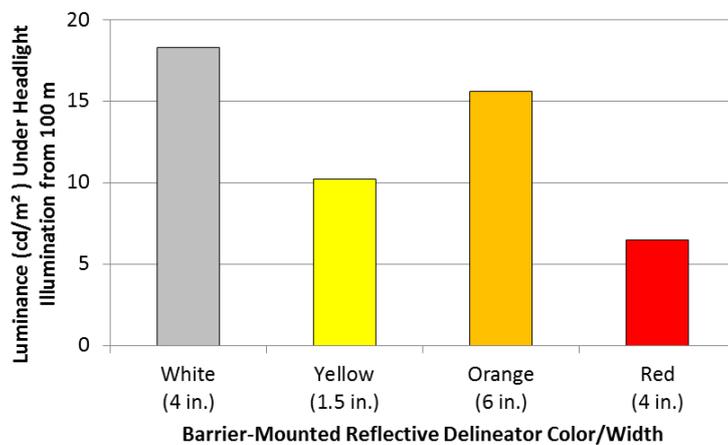


c.


Fig. 8. Luminances ( $\text{cd/m}^2$ ) under headlight illumination from 100 m away, for a. RPMs, b. wet reflective pavement marking tape, and c. barrier-mounted reflective delineators.

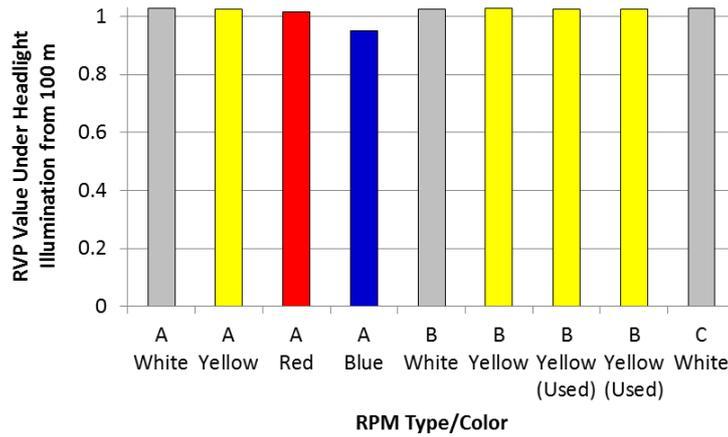

a.

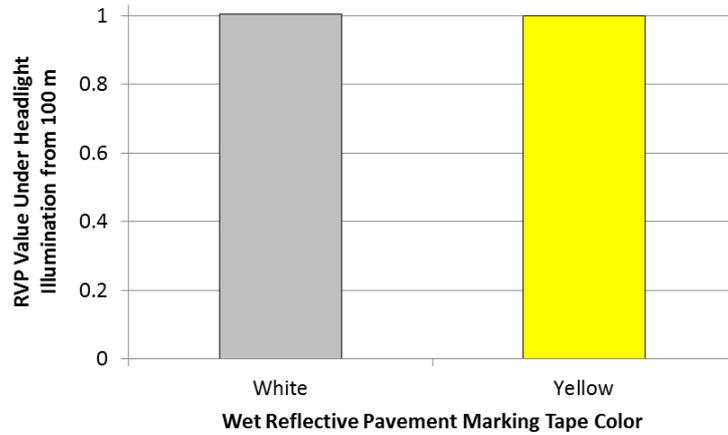

b.

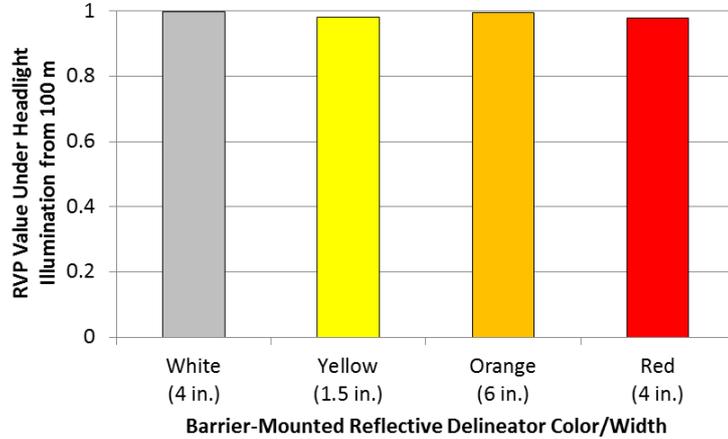

c.

Fig. 9. RVP values under headlight illumination from 100 m away, for a. RPMs, b. wet reflective pavement marking tape, and c. barrier-mounted reflective delineators.


As mentioned above in the discussion of Table 2, and as seen in the panels of Figures 9, the resulting RVP values for all of the devices (whether new or used) were very close to one (despite large variations in luminance shown in Figure 8), suggesting that they would all be highly visible from 100 m away under low beam headlight illumination for the geometric condition represented (i.e., straight ahead). In order to identify potential differences among the markers and devices that were measured, a further analysis was conducted to identify at what viewing distances each of the devices would begin to approach the threshold visual performance level corresponding to an RVP value of zero, the threshold of visual identification (Rea and Ouellette, 1991). To accomplish this, viewing distances were increased in 1-m steps starting between 100 m and 400 m, and RVP values were calculated using the same procedures as illustrated in Table 2 for each distance, in order to determine the distance at which the RVP dropped below zero, indicating the threshold viewing distance for each device. Longer viewing distances for pavement

markings have been linked to improved maintenance of lane position and vehicle speed, potentially improving safety (Horberry et al., 2006).


As the viewing distance from the device increases, two factors will decrease its visibility. First, the luminance will decrease because the illumination from the headlights will fall off according to the inverse square law (Rea, 2000); doubling the distance to the RPM results in reducing its luminance by a factor of four. Second, the apparent size of the RPM (i.e., the solid angle it subtends) will also decrease as the viewing distance increases (Rea, 2000), proportionally to the square of the distance. Thus, the devices would appear dimmer and smaller for larger viewing distances.

Figure 10 shows how RVP values for each of the RPMs change as a function of viewing distance between 100 and 400 m. (For ease of viewing, the data in Figure 10 are segregated by manufacturer.) The plateau characteristic of visual performance that has been discussed previously is evident for all RPMs. The RVP values change very little as distance increases until the threshold is approached, beyond which visual performance decreases precipitously, first for the RPMs with lower reflectances (i.e., blue and red) and then for those with higher reflectances (i.e., yellow and white). It can be seen that the RPMs that had higher luminances at 100 m (see Figure 9) would be expected to remain visible at substantially longer distances than those with lower luminances. For example, the white RPM from Manufacturer A essentially disappears at a distance of 396 m while the blue RPM of the same type disappears at a distance of 209 m.


Figures 11 and 12 show similar curves as in Figure 10, but for the wet reflective pavement marking tape samples and for the barrier-mounted reflective delineator samples, respectively. These figures also illustrate the plateau characteristic of visual performance as the viewing distance is increased from 100 to 400 m.

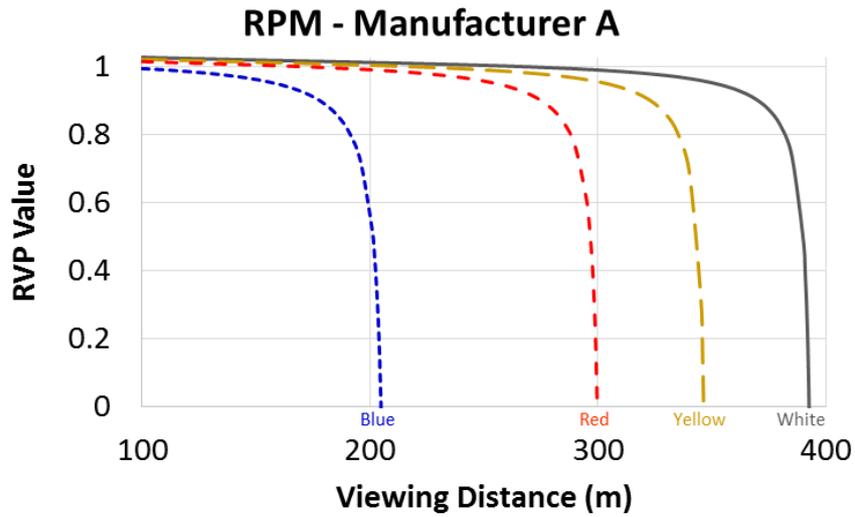

a.

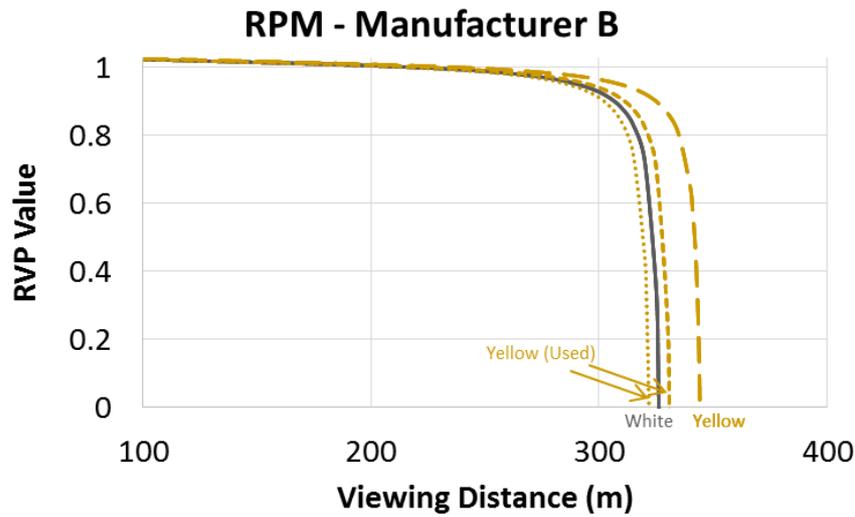

b.

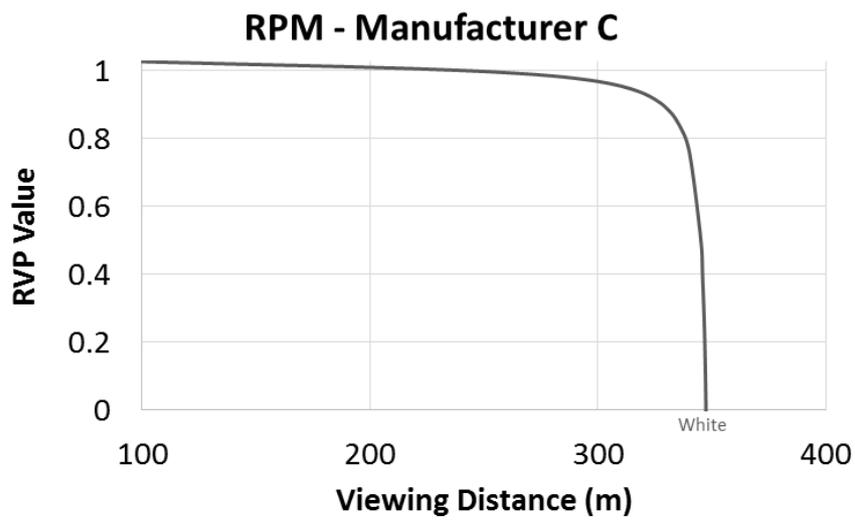

c.

Fig. 10. RVP values for each RPM type and color, as a function of viewing distance.

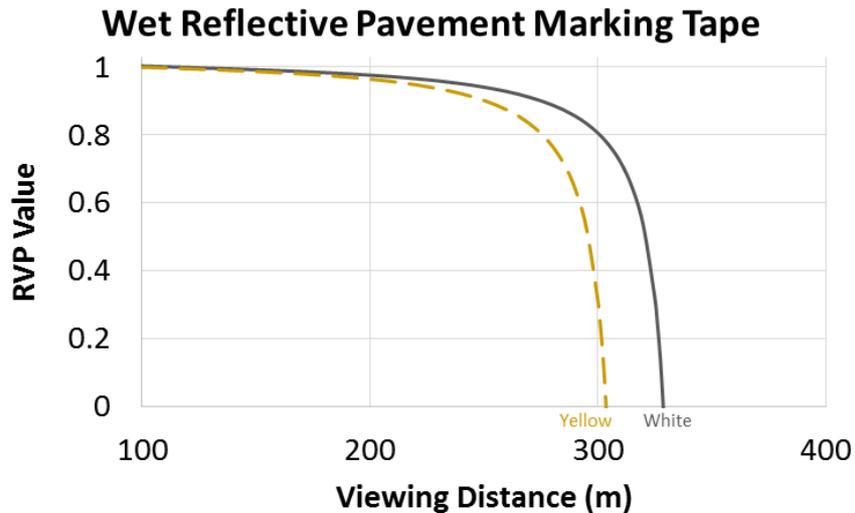


Fig. 11. RVP values for each wet reflective pavement marking tape color, as a function of viewing distance.

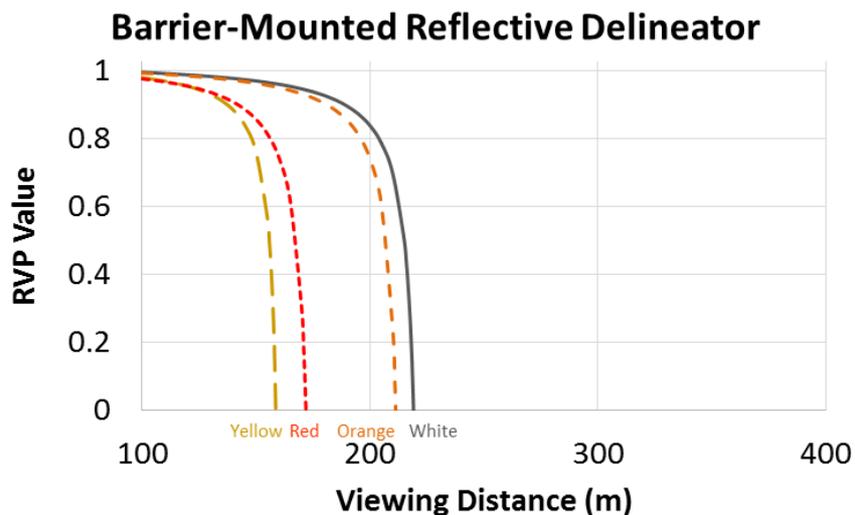


Fig. 12. RVP values for each barrier-mounted reflective delineator color, as a function of viewing distance.

## Conclusions

The laboratory measurement results and subsequent analyses of representative roadway luminances and visual performance quantities that could be expected under real-world headlight illumination conditions converge to demonstrate that RPMs and alternatives such as wet reflective pavement marking tape and barrier-mounted reflective delineators can be highly visible elements along the nighttime roadway environment. Although the photometric measurement method used for this exercise was not based on published standard methods such as those published by the ASTM (2012) in order to estimate visibility under a range of angular viewing conditions, the coefficients of retroreflectivity for the RPMs measured in this study have the same order of magnitude as the recently published data from Pike (2017), who conducted laboratory measurements of several white, yellow and red RPMs.

And while the luminance reductions of used RPMs in this study were on the order of 20% to 30% relative to new RPMs, such reductions were of little consequence to visual performance, particular for a viewing distance of 100 m, which corresponds to 3.7 s of driving time at 60 mph. It is not known, however, to what extent these values are representative of what can be found in the field, nor is it known exactly how old the used RPMs were.

Although all of the devices measured resulted in very high visual performance for a viewing distance of 100 m (i.e., RVP values  $\approx$  one; see Figure 9), differences among their luminances resulted in larger differences in the threshold visibility distance at which the resulting RVP values reached zero (see Figures 10 through 12), and these threshold

visibility differences might have practical implications for driving safety when large preview distances for assessing roadway geometries and configurations are needed. Of course, further data are needed to assess whether these greater preview distances would indeed reduce nighttime crashes.

Another factor not addressed by these analyses is the spacing or degree of continuous visual information needed to provide useful delineation. For example, although the barrier-mounted reflective delineators had somewhat lower RVP values than the RPMs tested in this study, they are meant to be used in more continuous configurations (Haas, 2004), similar to the wet reflective pavement marking tape. In a study of airfield delineation, Bullough and Skinner (2014) evaluated the spacing of simulated taxiway and runway lights and found that relative to lights placed 60 m apart, spacings of 30 m and less (including entirely continuous delineation) resulted in faster visual acquisition times. These data would require validation in the roadway context, but suggest that more continuous roadway delineation would be advantageous.

## References

- Abreha, D. A. (2007). *Analysing public transport performance using efficiency measures and spatial analysis; the case study of Addis Ababa, Ethiopia*. Ms Thesis, International Institute for Geo-Information Science and Earth Observation, Enschede, The Netherlands.
- American Society for Testing and Materials. (2012). *Standard Specification for Plowable, Raised Retroreflective Pavement Markers*, D4383. American Society for Testing and Materials, West Conshohocken, Penn.
- Bahar, G., C. Mollett, B. Persaud, C. Lyon, A. Smiley, T. Smahel, and H. McGee. (2004). *NCHRP Report 518: Safety Evaluation of Permanent Raised Pavement Markers*. Transportation Research Board, Washington, D.C.
- Bhise, V., E. Farber, C. Saunby, G. Troell, J. B. Walunas, and A. Bernstein. (1977). Modeling Vision with Headlights in a Systems Context. *SAE Technical Paper 770238*, doi:10.4271/770238.
- Bullough, J. D., and L. C. Radetsky. (2014). Roadway Lighting, Relative Visual Performance and Safety. *Presented at Illuminating Engineering Society Annual Conference*, Pittsburgh, Penn.
- Bullough, J. D., E. T. Donnell, and M. S. Rea. (2013). To Illuminate or Not to Illuminate: Roadway Lighting as it Affects Traffic Safety at Intersections. *Accident Analysis and Prevention*, 53(1), 65-77.
- Bullough, J. D., and N. P. Skinner. (2014). Can Linear Light Sources be Beneficial to Pilots? *Presented at the 2014 FAA Worldwide Airport Technology Transfer Conference*, Galloway, N.J.
- Bullough, J. D., N. P. Skinner, and C. P. O'Rourke. (2008). *Evaluation of New Reflective Materials for Highway Signage*, C-05-08. New York State Department of Transportation, Albany, N.Y.
- Federal Highway Administration. (2011). *Our Nation's Highways: 2011*. Federal Highway Administration, Washington, D.C.
- Griffin L. I. (1989). *Using the Before and After Design with Yoked Comparisons to Estimate the Effectiveness of Accident Countermeasures Implemented at Multiple Treatment Locations*. Texas Transportation Institute, College Station, Tex.
- Haas, K. (2004). *Evaluation of 3M Scotchlite Linear Delineation System*, OR-EF-05-03. Oregon Department of Transportation, Salem, Ore.
- Hammond, J. L., and F. J. Wegmann. (2001). Daytime Effects of Raised Pavement Markers on Horizontal Curves. *ITE Journal*, 71(8), 38-41.
- He, Y., M. S. Rea, A. Bierman, and J. D. Bullough. (1997). Evaluating Light Source Efficacy under Mesopic Conditions Using Reaction Times. *Journal of the Illuminating Engineering Society*, 26(1), 125-138.
- Horberty, T., J. Anderson, and M. E. Regan. (2006). The Possible Safety Benefits of Enhanced Road Markings: A Driving Simulator Evaluation. *Transportation Research Part F: Traffic Psychology and Behaviour*, 9(1), 77-87.
- Illuminating Engineering Society. (2014). *Roadway Lighting*, RP-8. Illuminating Engineering Society, New York, N.Y.
- Krammes, R. A., and K. D. Tyler. (1991). Post-Mounted Delineators and Raised Pavement Markers: Their Effect on Vehicle Operations at Horizontal Curves on Two-Lane Rural Highways. *Transportation Research Record: Journal of the Transportation Research Board*, (1324), 59-71.
- Lay, M. G. (2009). *Handbook of Road Technology*, 4th Edition. Spon Press, New York, N.Y.
- Liang, G., D. Zhang, S. Du, Y. Yin, R. Li, and B. Shi. (2018). Effects of the Installation Angle of Raised Pavement Markers on a Horizontal Curve Section on the Line of Sight Induction Performance. *Mathematical Problems in Engineering*, 2018, 3541784.
- Lu, Q., L. Guo, and B. Yu. (2016). Design Improvements of Retroreflective Raised Pavement Markers Based on Quantification of Their Physical Properties. *Presented at Transportation Research Board 95<sup>th</sup> Annual Meeting*, Washington, D.C.
- New York State Department of Transportation. (1997). *Raised Reflectorized Snowplowable Pavement Markers: Report to the Governor*. New York State Department of Transportation, Albany, N.Y.
- Niessner, C. W. (1984). *Raised Pavement Markers at Hazardous Locations*, FHWA-TS-84-215. Federal Highway Administration, Washington, D.C.
- Pike, A. M. (2017). Laboratory-Based Retroreflectivity Assessment of Raised Retroreflective Pavement Markers. *Transportation Research Record: Journal of the Transportation Research Board*, (2612), 113-120.
- Rea, M. S., editor. (2000). *IESNA Lighting Handbook: Reference and Application*, 9th edition. Illuminating Engineering Society, New York, N.Y.
- Rea, M. S., and M. J. Ouellette. (1991). Relative Visual Performance: A Basis for Application. *Lighting Research and Technology*, 23(3), 135-144.
- Schoettle, B., M. Sivak, M. J. Flannagan, and W. Kosmatka. (2004). *A Market Weighted Description of Low Beam Headlighting Patterns in the U.S.: 2004*, UMTRI-2004-25. University of Michigan, Ann Arbor, Mich.
- Wright, P. H., P. L. Zador, C. Y. Park, and R. S. Karpf. (1982). *Effect of Pavement Markers on Nighttime Crashes in Georgia*. Insurance Institute for Highway Safety, Washington, D.C.

Zador, P. L., H. S. Stein, P. Wright, and J. Hall. (1987). Effects of Chevrons, Post-Mounted Delineators, and Raised Pavement Markers on Driver Behavior at Roadway Curves. *Transportation Research Record: Journal of the Transportation Research Board*, (1114), 1-10.